

# Stainless Steel Bathing Tub



**USERS MANUAL** 

# Thank you for purchasing our products!

The Davis Stainless Steel Bathing Tub is designed for professional pet bathing. It features splash guards, deluxe stainless steel panels, an easy-to-use sliding door, overhead slip arm, a water sprayer bracket, restraint loops, storage basket, alloy sprayer, anti-slippery bottom mat, raised floor grate, stainless steel drain and hair trap, two tub floor panels and waste hose.







#### PACKAGE INSPECTION

For motor freight shipments (large items and pallets) - Please retain the original shipping container. Inspect the item(s) carefully and make sure nothing is damaged before signing for it. If you have any concerns do not sign for it. If this happens, contact us at 1-800-292-2424 or email us at customerservice@davismfg.com. If you sign for an item as delivered in good condition, free of damage, it is almost impossible to file a damage claim. For that reason, Davis Manufacturing cannot be held responsible for shipments after they are signed for. Photos of damaged shipment may be requested.

Once you've determined that there is not outside damage, the unit should be unpacked carefully; all components, accessories, and the table itself should be inspected for any damage or loss. If any damage is evident, you must contact Davis Manufacturing immediately.

#### **SAFETY WARNINGS**

- 1. Use only as described in this manual. Use only manufacturer's recommended attachments.
- DO NOT use outdoors or on wet surfaces. DO NOT place the product on an uneven or soft ground.
- 3. This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by a person responsible for their safety. Children should be supervised to ensure that they do not play with the product.
- 4. DO NOT modify, disassemble or repair.
- 5. Avoid using the product in dusty, vibrating and wet environment and in chemical storage place.

# **PARAMETERS**


Product Dimensions	127cm × 69cm × 134.5cm
	50" × 27 <sup>11</sup> / <sub>64</sub> " × 52 <sup>6</sup> 1/ <sub>64</sub> "
Package Dimensions	134cm × 74cm × 65cm
	45" x 26" x 22"
Net Weight	125.7 lbs
Gross Weight	176.3 lbs
Volume	0.64cbm


## **ASSEMBLY INSTRUCTIONS**




- 1. Unpack and assemble the Base Leg with screws.
- 2. Place the Tub Basin onto the Base Leg. Bolt the Tub Basin to the Base Leg by putting screws into the holes on the bottom of both sides of the Tub Basin.
- Insert the Tub Splash, the largest plate is on the back, and two smaller ones on both sides. Inset Bolts and securely tighten them with Nuts.
- 4. Pull the Overhead Grooming Arm to a proper length, and fasten it with Clamp. Connect it with the side splash plates with Screws.
- 5. Put the Tub Splash onto the Tub Basin. Insert Bolts and securely tighten them with Nuts. Put the Hair Catching Drainage in the drain hole of the Tub Basin and securely bolt the Hair Catching Drainage to the Waste Hose. Apply the silicone sealant evenly onto the contact surface around the drain hole on the bottom of the Tub Basin. Put the Drain Head in the drain hole and screw the Drain Head to Drain Hose securely and use lock collar to fasten.
- 6. Screw the Sprayer Holder and Dog Fixture Ring onto the back plate.
- 7. Screw the Faucet onto the side plate.
- 8. Put The Anti-slip bottom mat in the Tub Basin.
- 9. Insert the Step-on Ramp to the bottom of the Tub Basin, and make sure it stands steadily.

#### REQUIREMENTS & ADVICE ON PLUMBING DRAIN



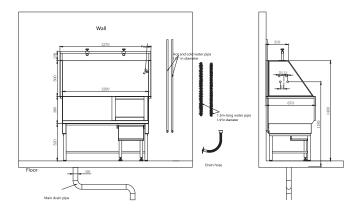



- The drain pipes or drain holes on the ground should be 13.8 inches or a little farther from the wall to prevent being blocked by the base of the bathtub.
- 2. The drain pipes or drain holes should be right below the drain hole on the bathtub. On usual standard, the drain holes are 15.7 inches away from the left/right side of the bathtub.
- The bundled drain hose is 1.6 inches in diameter, so the drain pipes or drain holes on the floor should be 2 inches or bigger in diameter.
- 4. The main drain pipe should be 3 inches or bigger in diameter to prevent possible backflow.

### **WATER SUPPLY**

- 1. The built-in-wall water supply pipes are better.
- 2. The faucet/tap should be installed on the tub side where is near the water supply pipe.
- 3. For convenience of connection, the built-outside-wall water supply pipes should be no higher than 17.7 inches above the floor; the same with the outlet pipe of the built- in-wall water supply pipes.
- 4. The distance between the centers of the inlet water pipes of the hot and cold water faucets/taps should be 3 inches, 5.9 inches, 8.9 inches or 11.8 inches.
- 5. Corrugated pipes, which are used to connect the faucet/tap and the water supply pipe, could be 4.9 feet, if the side where faucet is on and the height of the water supply pipe both meet our requirements.

#### **OPERATION INSTRUCTIONS**

- To bathe large breeds or older dogs, lead it along the Step-on Ramp into the Tub.
  To bathe small breeds, put the pet on the raised floor grate in the tub.
- 2. Proceed with bathing process.
- 3. After the bath, let the water out of the tub and take the animal out.
- 4. Clean the tub with a cloth.

#### **MAINTENANCE**

After each use, the tub should be disinfected and cleaned with a soft cloth or sponge using a mild cleaning agent.

Please make sure you do regular maintenance on your tub. Tighten and lubricate all the nuts and bolts on a monthly basis to ensure the longevity of this product.

#### **SERVICE SUPPORT**

Contact Davis Manufacturing at customerservice@davismfg.com or 800-292-2424 if you have problems with your tub.

#### LIMITED WARRANTY

This Davis Stainless Steel Tub has a one year limited warranty from the date of purchase. The warranty does not cover normal wear and tear or damage caused by human factors. Please contact Davis Manufacturing Customer Service at 1-800-292-2424 for warranty services. Davis Manufacturing will not be liable under this warranty for any object, failure or malfunction of this product caused by normal wear, abuse, misuse, unauthorized adjustment or repairs. Davis Manufacturing will not be liable for any incidental or consequential damages of any type. Any implied warranty is limited to the one-year period provided in this express warranty. Some states do not allow limitations on how long an implied warranty lasts or exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Warranty is void if product has been modified in any manner or has been subjected to unreasonable use. Warranty is valid in United States.

Follow us on:



facebook.com/davismfg



instagram.com/davismfg



youtube.com/davismfg

# ProPet Washer 7.0™





#### ProPet Washer 7.0™

Easily switch between as many as 7 products

New and improved system helps give a better bath and saves time:

- · Simple do-it-yourself mounting
- No more pre-diluting product
- Includes 5 metering tips for each port, allowing you to dilute your shampoos at different rates
- Heavy duty spray gun with signature nozzle adds power to water flow for a quick, deep-cleaning bath and rinse
- Foaming wand accessory is great for applying medicated and flea shampoo
- Includes gentle wash grey nozzle ideal for use on smaller breeds

**Item** ProPet Washer™

Item No. PROPW.7.2



Heavy Duty Sprayer





Foaming Wand





Gentle Wash Nozzle



Visit us at www.davismfg.com or call us at 1-800-292-2424 for additional products and pricing